
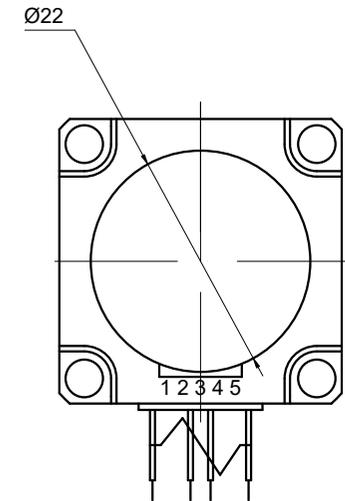
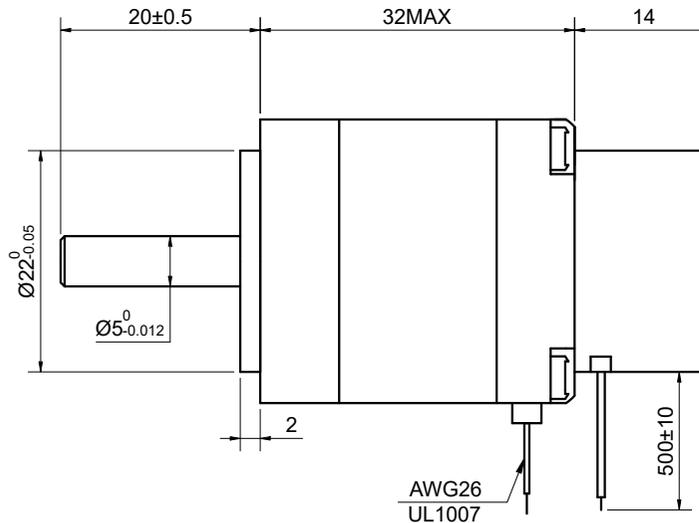


DWG NO. -

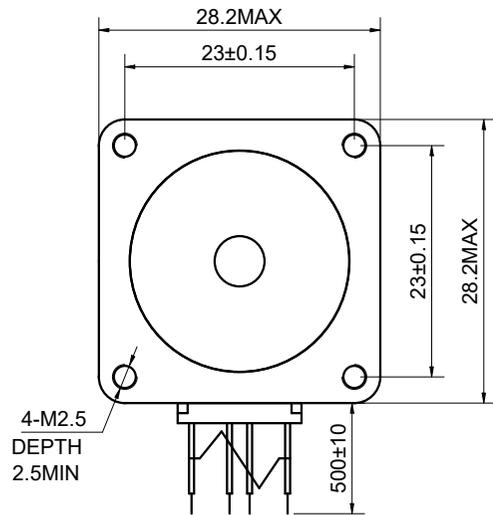

HKT2204-702C1-300B-5E

Voltage	Output	Resolution
5V	A B	300 PPR

Flat Cable	1	2	3	4	5
Voltage Output	0V	N.C	Ch B	+5V	Ch A


FULL STEP 2 PHASE-Ex., WHEN FACING MOUNTING END (X)

STEP	A+	B+	A-	B-		CCW
1	+	+	-	-		CCW ↑
2	-	+	+	-		
3	-	-	+	+		
4	+	-	-	+		

UNIT mm
 GB/T 1804-M EQV.ISO
 2768-1 CLASS M:
 <=6 ±0.1
 >6~30 ±0.2
 >30~120 ±0.3
 >120~400 ±0.5

WINDING			CONNECTION	BIPOLAR
			SPECIFICATION	
			AMPS/PHASE	0.67
			RESISTANCE/PHASE(Ohms)@25°C	5.60±10%
			INDUCTANCE/PHASE(mH)@1KHz	4.00±20%
			HOLDING TORQUE(Nm)[lb-in]	0.07[0.62]
			STEP ANGLE(°)	1.80
			STEP ACCURACY(NON-ACCUM)	±5.00%
PIN NO	BIPOLAR	LEADS	ROTOR INERTIA(g-cm ²)	9.00
1	A+	BLK	WEIGHT(Kg)[lb]	—
2	A-	GRN	AMBIENT TEMPERATURE	-10°C~50°C[14°F~122°F]
3	B+	RED	INSULATION CLASS	B 130°C[266°F]
4	B-	BLU	TEMPERATURE RISE	MAX.80°C

OSMTEC®
 Stepper Motor Specialists



mm

UNITS

3:2

SCALE

DRN

APVD

SIGNATURE

ZPJ

YSX

DATE

1.13.2026

1.13.2026

STEPPER MOTOR

11HS12-0674D-E22-300