
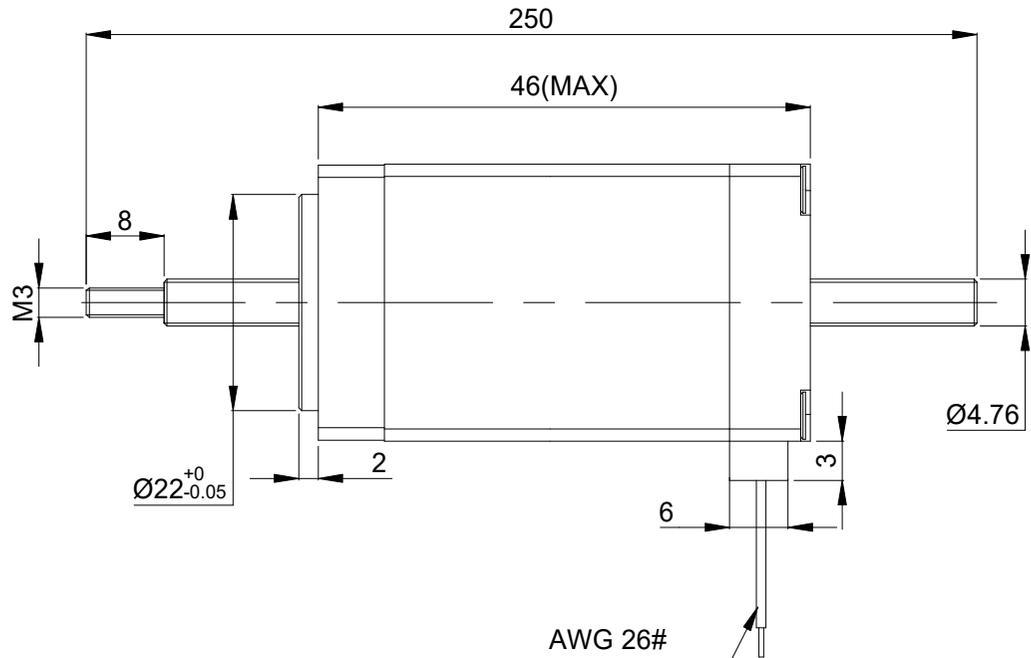


DWG NO. -

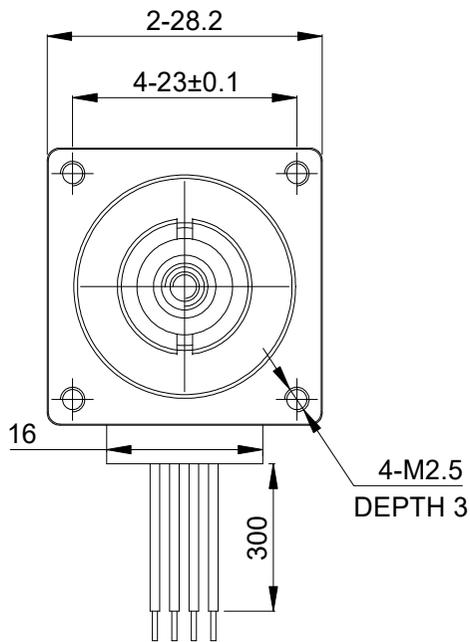


FULL STEP 2 PHASE-Ex.,WHEN FACING MOUNTING END (X)

STEP	A+	B+	A-	B-		CCW
1	+	+	-	-	 CW	↑
2	-	+	+	-		
3	-	-	+	+		
4	+	-	-	+		

UNIT mm
GB/T 1804-M EQV.ISO
2768-1 CLASS M:
<=6 ±0.1
>6~30 ±0.2
>30~120 ±0.3
>120~400 ±0.5

WINDING			CONNECTION		BIPOLAR
			SPECIFICATION		
			AMPS/PHASE		0.75
			RESISTANCE/PHASE(Ohms)@25°C		6.70±10%
			INDUCTANCE/PHASE(mH)@1KHz		5.80±20%
			MINIMAL THRUST(N)@300 PPS		40
			STEP ANGLE(°)		1.80
STEP ACCURACY(NON-ACCUM)		±5.00%			
PIN NO	BIPOLAR	LEADS	LEAD(mm)	2.54	
1	A+	RED	LINEAR TRAVEL/STEP(mm)	0.0127	
2	A-	RED/WHT	AMBIENT TEMPERATURE	-10°C~50°C[14°F~122°F]	
3	B+	GRN/WHT	INSULATION CLASS	B 130°C[266°F]	
4	B-	GRN	TEMPERATURE RISE	MAX.80°C	

OSMTEC[®]
Stepper Motor Specialists



mm

UNITS DRN LDJ 1.15.2026

3:2 APVD ZPJ 1.20.2026

SCALE SIGNATURE DATE

LINEAR STEPPER MOTOR

11N18S0754GD3-250RS