
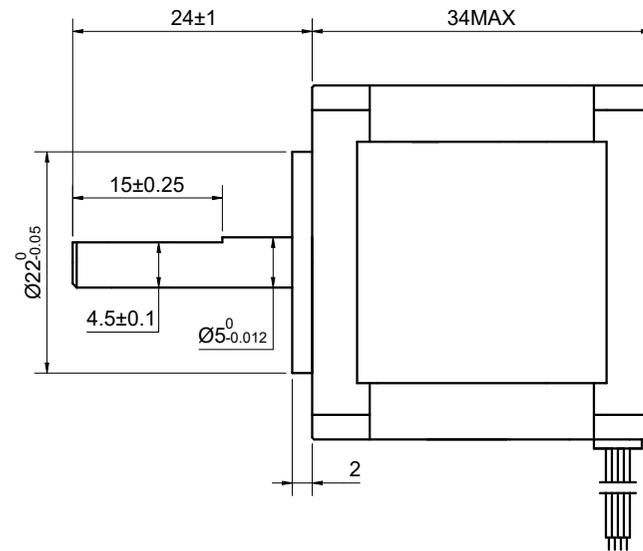


DWG NO. _____

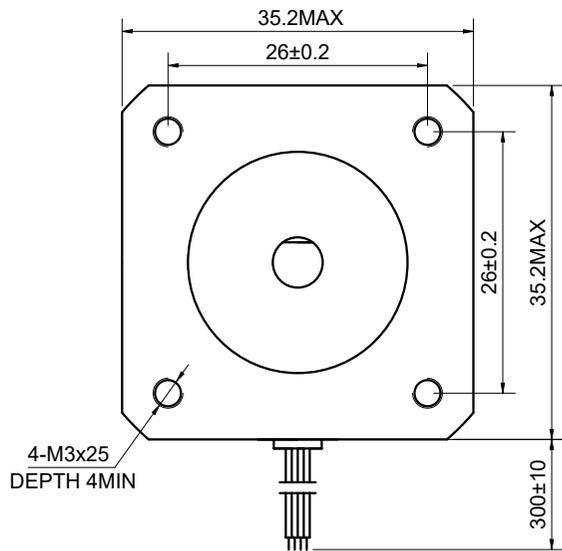


FULL STEP 2 PHASE-Ex., WHEN FACING MOUNTING END (X)

STEP	A+	B+	A-	B-		CCW
1	+	+	-	-	 CW	↑
2	-	+	+	-		
3	-	-	+	+		
4	+	-	-	+		

UNIT mm
 GB/T 1804-M EQV.ISO
 2768-1 CLASS M:
 <=6 ±0.1
 >6~30 ±0.2
 >30~120 ±0.3
 >120~400 ±0.5

WINDING			CONNECTION	UNIPOLAR
			SPECIFICATION	
			AMPS/PHASE	0.40
			RESISTANCE/PHASE(Ohms)@25°C	25.00±10%
			INDUCTANCE/PHASE(mH)@1KHz	17.00±20%
			HOLDING TORQUE(Nm)[lb-in]	0.10[0.89]
PIN NO	BIPOLAR	LEADS	STEP ANGLE(°)	1.80
1	A+	RED	STEP ACCURACY(NON-ACCUM)	±5.00%
2	A-	YEL	ROTOR INERTIA(g-cm²)	1400
3	B+	BLU	WEIGHT(Kg)[lb]	—
4	B-	GRN	AMBIENT TEMPERATURE	-10°C~50°C[14°F~122°F]
5	O+	BRN	INSULATION CLASS	B 130°C[266°F]
6	O-	ORG	TEMPERATURE RISE	MAX.80°C

OSMTEC®
 Stepper Motor Specialists



mm

UNITS

3:2

SCALE

DRN

APVD

SIGNATURE

YSX

LJ

DATE

1.12.2026

1.12.2026

STEPPER MOTOR

14HS13-0406S