


DWG NO. -

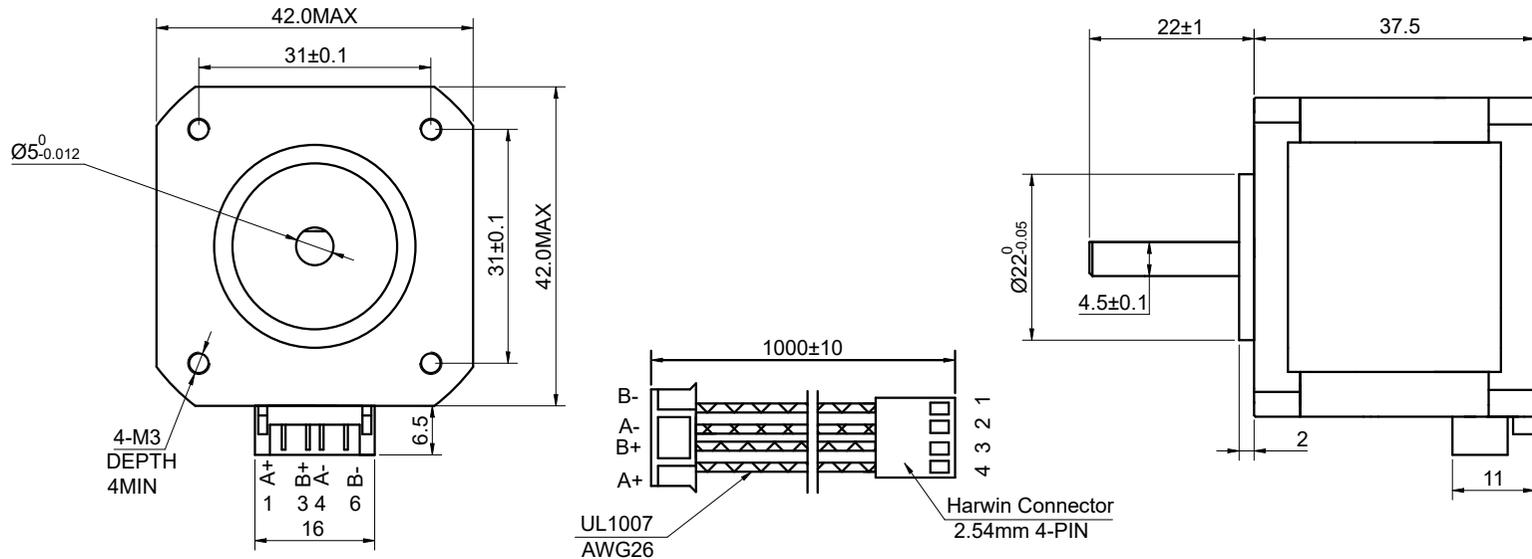


FULL STEP 2 PHASE-Ex., WHEN FACING MOUNTING END (X)

STEP	A+	B+	A-	B-		CCW
1	+	+	-	-	 ↓ ↑ CW CCW	
2	-	+	+	-		
3	-	-	+	+		
4	+	-	-	+		

UNIT mm
 GB/T 1804-M EQV.ISO
 2768-1 CLASS M:
 ≤6 ±0.1
 >6~30 ±0.2
 >30~120 ±0.3
 >120~400 ±0.5

WINDING			CONNECTION		BIPOLAR
			SPECIFICATION		
			AMPS/PHASE		1.70
			RESISTANCE/PHASE(Ohms)@25°C		2.30±10%
			INDUCTANCE/PHASE(mH)@1KHz		4.00±20%
			HOLDING TORQUE(Nm)[lb-in]		0.42[3.72]
			STEP ANGLE(°)		1.80
PIN NO			BIPOLAR	LEADS	
1	A+	RED	ROTOR INERTIA(g·cm²)		—
2	A-	BLU	WEIGHT(Kg)[lb]		—
4	B+	BLK	AMBIENT TEMPERATURE		-10°C~50°C[14°F~122°F]
3	B-	GRN	INSULATION CLASS		B 130°C[266°F]
			TEMPERATURE RISE		MAX.80°C

OSMTEC®
 Stepper Motor Specialists



mm

UNITS

1:1

SCALE

DRN

APVD

SIGNATURE

YSX

LJ

DATE

1.13.2026

1.13.2026

STEPPER MOTOR

17HE15-1704S