
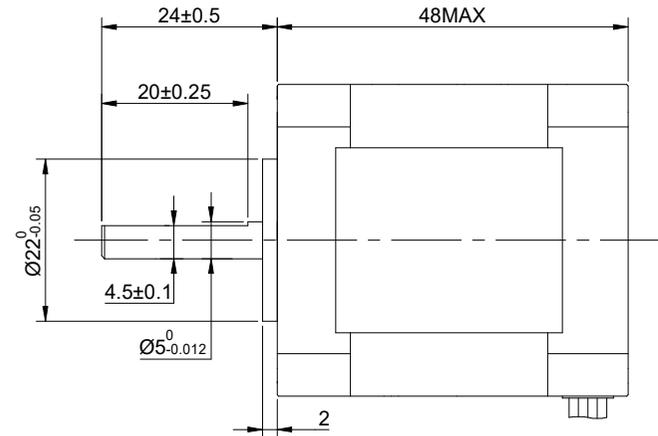


DWG NO. -

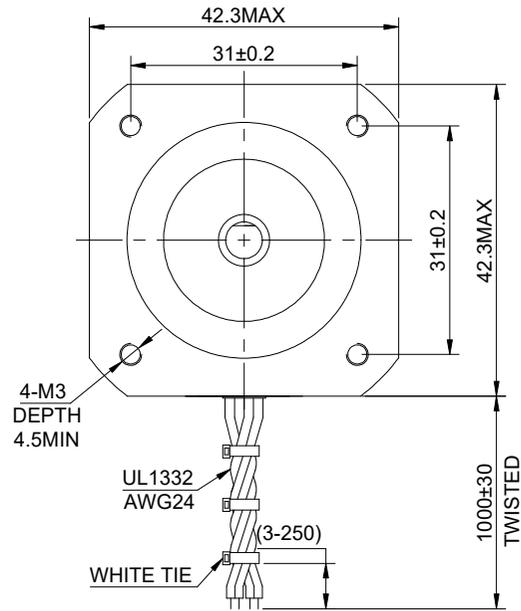

FULL STEP 2 PHASE-Ex.,WHEN FACING MOUNTING END (X)

STEP	A+	B+	A-	B-		CCW	UNIT mm GB/T 1804-M EQV.ISO 2768-1 CLASS M: <=6 ±0.1 >6~30 ±0.2 >30~120 ±0.3 >120~400 ±0.5
1	+	+	-	-	 CW CCW		
2	-	+	+	-			
3	-	-	+	+			
4	+	-	-	+			

WINDING			CONNECTION	
			SPECIFICATION	BIPOLAR
			AMPS/PHASE	2.50
			RESISTANCE/PHASE(Ohms)@25°C	1.10±10%
			INDUCTANCE/PHASE(mH)@1KHz	1.60±20%
			HOLDING TORQUE(Nm)[lb-in]	0.55[4.87]
			STEP ANGLE(°)	1.80
PIN NO	BIPOLAR	LEADS	ROTOR INERTIA(g-cm ²)	68.00
1	A+	GRY	WEIGHT(Kg)[lb]	—
2	A-	BRN	AMBIENT TEMPERATURE	-10°C~50°C[14°F~122°F]
3	B+	ORG	INSULATION CLASS	H 180°C[356°F]
4	B-	YEL	TEMPERATURE RISE	MAX.125°C

OSMTEC[®]
Stepper Motor Specialists

mm			
UNITS	DRN	LDJ	1.13.2026
SCALE	1:1	APVD	ZPJ 1.19.2026
SIGNATURE		DATE	

STEPPER MOTOR
17HS19-2504S-H