
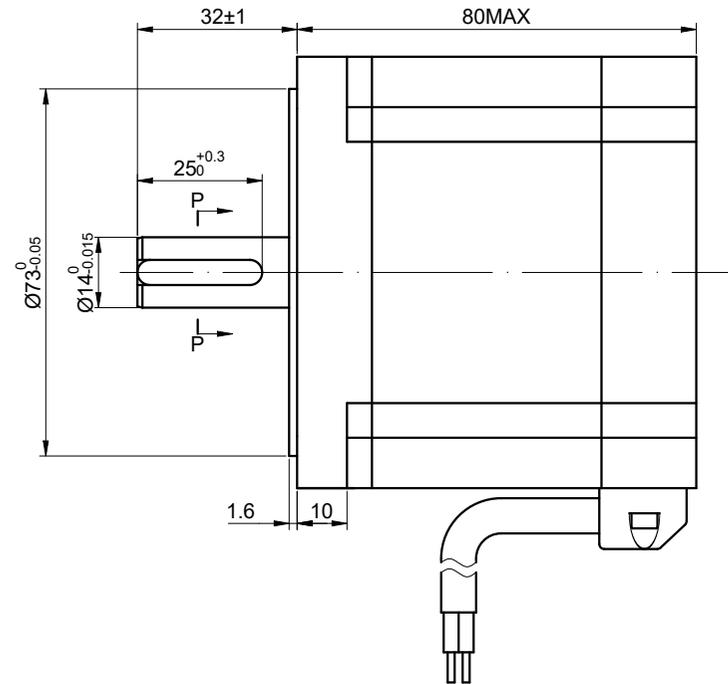



DWG NO. -

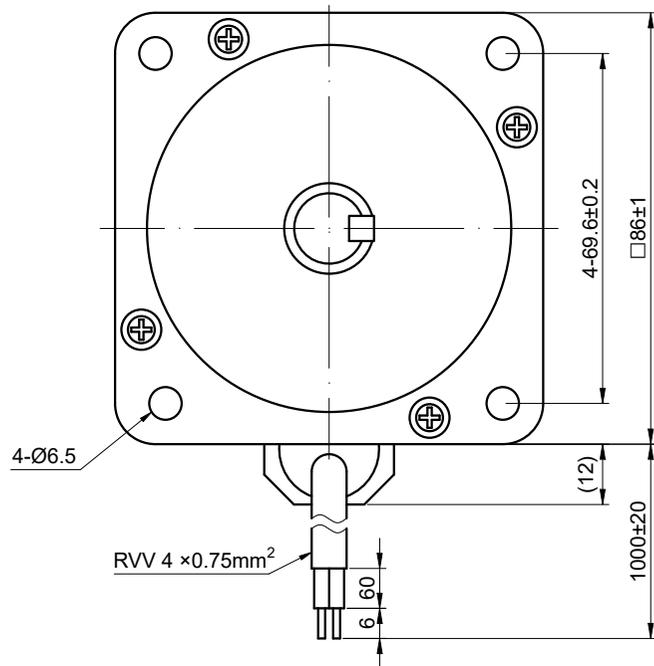


FULL STEP 2 PHASE-Ex., WHEN FACING MOUNTING END (X)

STEP	A+	B+	A-	B-		CCW
1	+	+	-	-	↓ ↑ CW	↑
2	-	+	+	-		
3	-	-	+	+		
4	+	-	-	+		

UNIT mm
GB/T 1804-M EQV.ISO
2768-1 CLASS M:
<=6 ±0.1
>6~30 ±0.2
>30~120 ±0.3
>120~400 ±0.5

WINDING			CONNECTION		BIPOLAR
			SPECIFICATION		
			AMPS/PHASE		6.00
			RESISTANCE/PHASE(Ohms)@25°C		0.48±10%
			INDUCTANCE/PHASE(mH)@1KHz		3.50±20%
			HOLDING TORQUE(Nm)[lb-in]		4.80[42.53]
			STEP ANGLE(°)		1.80
			STEP ACCURACY(NON-ACCUM)		±5.00%
PIN NO	BIPOLAR	LEADS	ROTOR INERTIA(g-cm ²)		1400
1	A+	BLK	WEIGHT(Kg)[lb]		2.5
2	A-	GRN	AMBIENT TEMPERATURE		-10°C~50°C[14°F~122°F]
3	B+	RED	INSULATION CLASS		B 130°C[266°F]
4	B-	BLU	TEMPERATURE RISE		MAX.80°C

OSMTEC®
Stepper Motor Specialists



mm			
UNITS	DRN	YSX	1.13.2026
2:3	APVD	LJ	1.13.2026
SCALE	SIGNATURE	DATE	

STEPPER MOTOR

34HS31-6004S1