


DWG NO. -

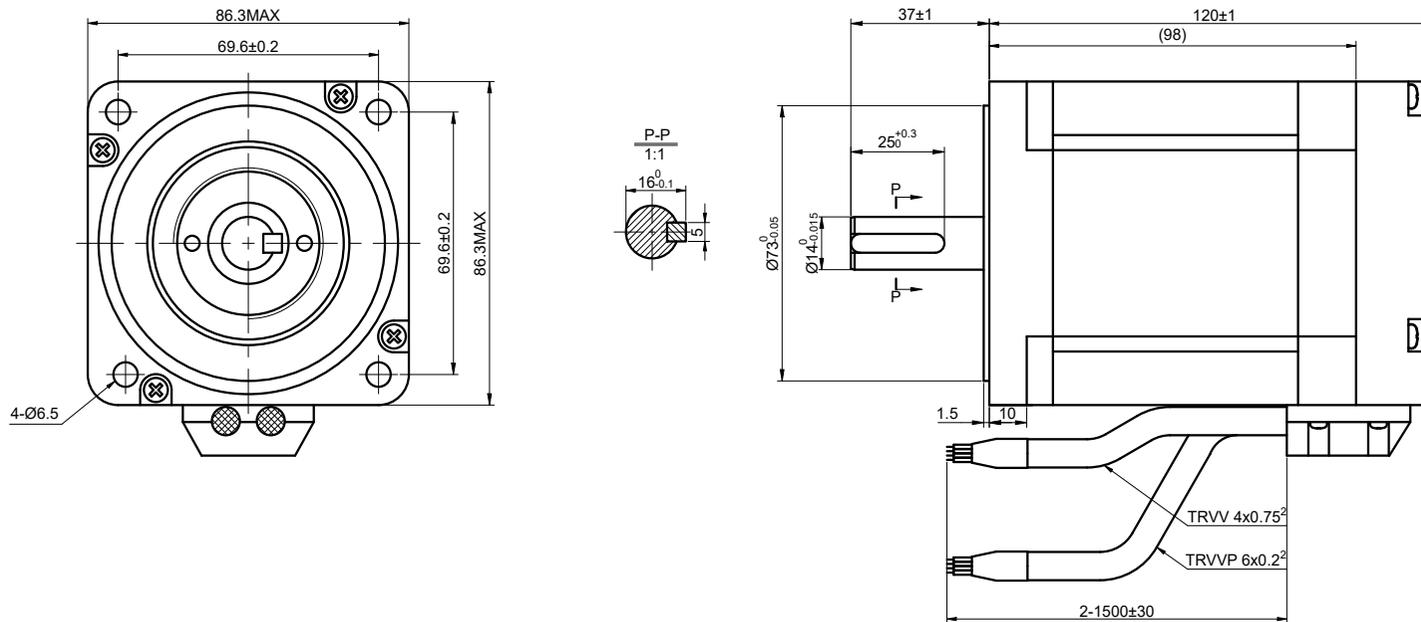

ENCODER RESOLUTION:1000PPR(4000CPR)

DESCRIPTION	EA+	VCC	GND	EB+	EB-	EA-
COLOUR	BLK	RED	WHT	YEL	GRN	BLU


FULL STEP 2 PHASE-Ex.,WHEN FACING MOUNTING END (X)

STEP	A+	B+	A-	B-		CCW
1	+	+	-	-		
2	-	+	+	-		
3	-	-	+	+		
4	+	-	-	+	CW	

UNIT mm  
 GB/T 1804-M EQV.ISO  
 2768-1 CLASS M:  
 ≤6 ±0.1  
 >6~30 ±0.2  
 >30~120 ±0.3  
 >120~400 ±0.5

WINDING			CONNECTION	BIPOLAR
			SPECIFICATION	
			AMPS/PHASE	6.00
			RESISTANCE/PHASE(Ohms)@25°C	0.43±10%
			INDUCTANCE/PHASE(mH)@1KHz	2.60±20%
			HOLDING TORQUE(Nm)[lb-in]	6.50[57.53]
			STEP ANGLE(°)	1.8
			STEP ACCURACY(NON-ACCUM)	±5.00%
PIN NO	BIPOLAR	LEADS	ROTOR INERTIA(g-cm²)	3600
1	A+	BLK	WEIGHT(Kg)[lb]	3.5[7.72]
2	A-	GRN	AMBIENT TEMPERATURE	-10°C~50°C[14°F~122°F]
3	B+	RED	INSULATION CLASS	B 130°C[266°F]
4	B-	BLU	TEMPERATURE RISE	MAX.80°C

**OSMTEC**®  
 Stepper Motor Specialists



mm

UNITS

1:2

SCALE

DRN

APVD

SIGNATURE

ZPJ

YSX

1.16.2026

1.16.2026

DATE

STEPPER MOTOR

34HS39-6004D-E1K-1M5