

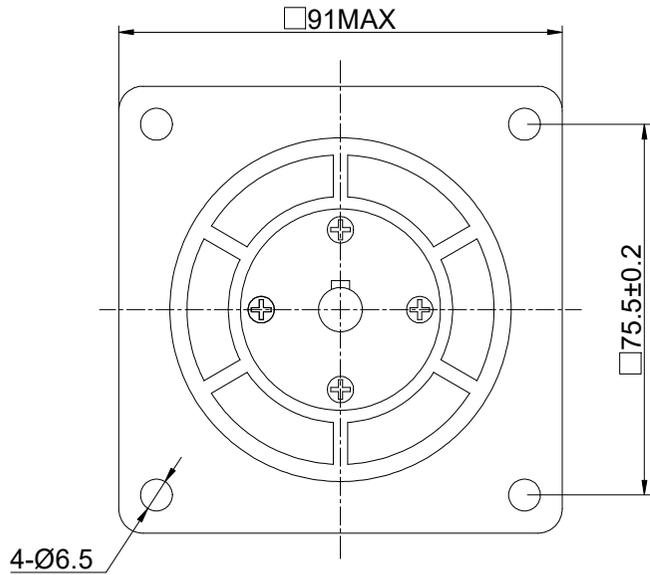


DWG NO. -


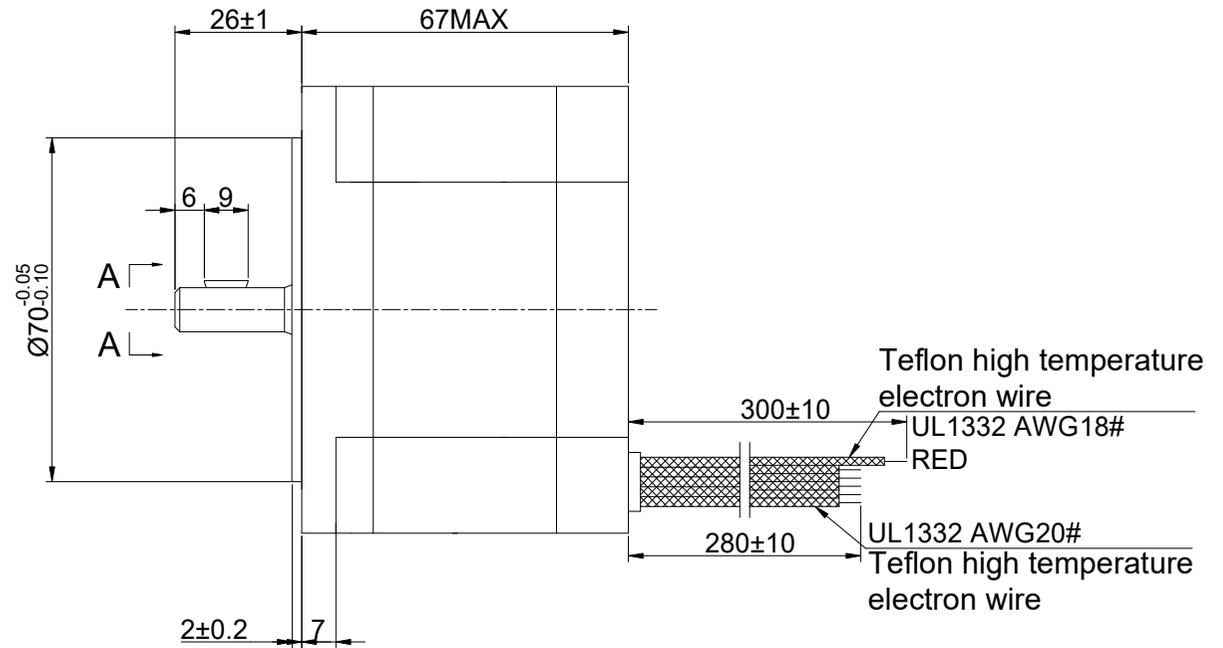


A-A 2:1

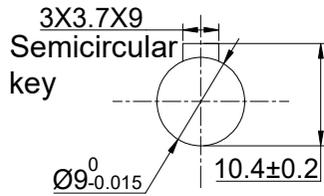

UNIT mm  
 GB/T 1804-M EQV.ISO  
 2768-1 CLASS M:  
 ≤6 ±0.1  
 >6~30 ±0.2  
 >30~120 ±0.3  
 >120~400 ±0.5

WINDING	CONNECTION	BIPOLAR
	SPECIFICATION	
	AMPS/PHASE	3.00
	RESISTANCE/PHASE(Ohms)@25°C	0.86±10%
	INDUCTANCE/PHASE(mH)@1KHz	16.00±20%
	HOLDING TORQUE(Nm)[lb-in]	3.20[28.32]
	STEP ANGLE(°)	0.36/0.72
	STEP ACCURACY(NON-ACCUM)	±5.00%
	ROTOR INERTIA(g-cm <sup>2</sup> )	—
	WEIGHT(Kg)[lb]	—
	AMBIENT TEMPERATURE	-10°C~50°C[14°F~122°F]
	INSULATION CLASS	B 130°C[266°F]
	TEMPERATURE RISE	MAX.80°C

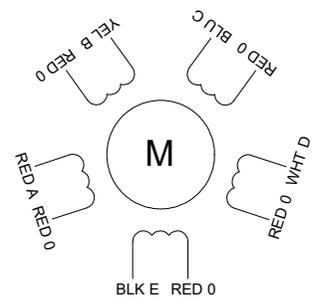

mm			
UNITS	DRN	LDJ	1.13.2026
2:3	APVD	ZPJ	1.19.2026
SCALE	SIGNATURE		DATE

**STEPPER MOTOR**  
**35VR26-3005S**

**OSMTEC**®  
 Stepper Motor Specialists