
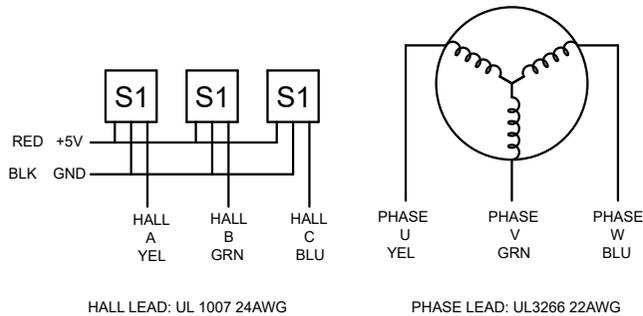
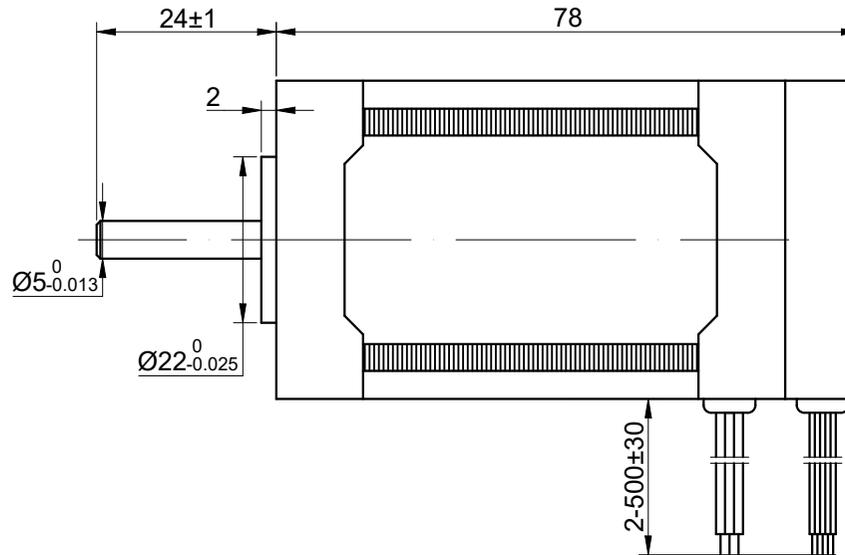


DWG NO. -

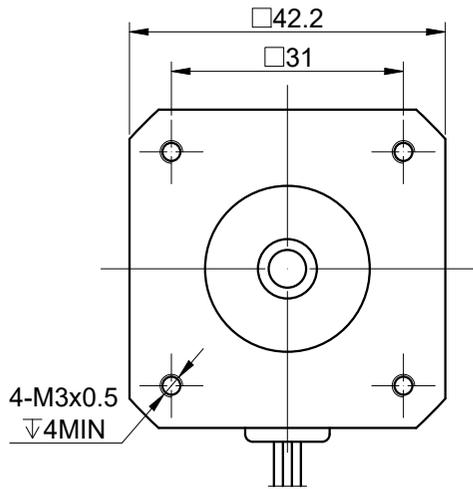


SPECIFICATION	VALUE
NO. of PHASES	3
NO. of POLES	8
RESISTANCE/PHASE(Ohms)@25°C	1.03±10%
INDUCTANCE/PHASE(mH)@1KHz	0.43±20%
RATED VOLTAGE(V)	24
RATED TORQUE(N.m)[lb-in]	0.24[2.12]
RATED POWER(W)	75
RATED SPEED(RPM)	3000±10%
RATED CURRENT(A)	4.80
NO LOAD SPEED(RPM)	4000±10%
WEIGHT(kg)	0.57
BACK EMF(V/krpm)	4.41±5%
SENSOR	HALL
AMBIENT TEMPERATURE	-10°C~50°C[14°F~122°F]
INSULATION CLASS	B 130°C[266°F]
TEMPERATURE RISE	MAX.80°C

UNIT mm  
 GB/T 1804-M EQV.ISO 2768-1 CLASS M:

<=6	±0.1
>6~30	±0.2
>30~120	±0.3
>120~400	±0.5

**OSMTEC**®  
 Stepper Motor Specialists



mm			
UNITS	DRN	MYX	1.15.2026
3:2	APVD	LDJ	1.15.2026
SCALE	SIGNATURE	DATE	

**BRUSHLESS DC MOTOR**

**42BSA78-24-01**