
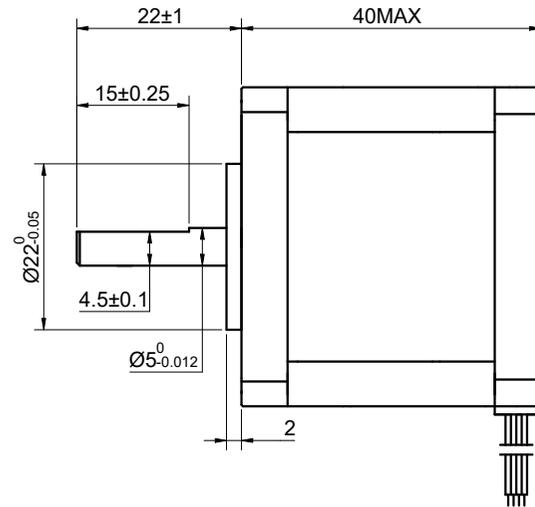


DWG NO. -

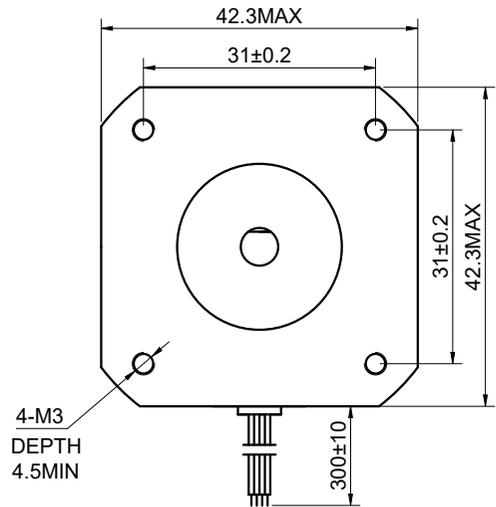


FULL STEP 2 PHASE-Ex., WHEN FACING MOUNTING END (X)

STEP	A+	B+	A-	B-		CCW
1	+	+	-	-		UNIT mm GB/T 1804-M EQV.ISO 2768-1 CLASS M: <=6 ±0.1 >6~30 ±0.2 >30~120 ±0.3 >120~400 ±0.5
2	-	+	+	-		
3	-	-	+	+		
4	+	-	-	+		

WINDING			CONNECTION	BIPOLAR
			SPECIFICATION	
			AMPS/PHASE	0.90
			RESISTANCE/PHASE(Ohms)@25°C	5.30±10%
			INDUCTANCE/PHASE(mH)@1KHz	13.00±20%
			HOLDING TORQUE(Nm)[lb-in]	0.36[3.19]
			STEP ANGLE(°)	0.90
PIN NO	BIPOLAR	LEADS	ROTOR INERTIA(g-cm ²)	54.00
1	A+	BLK	WEIGHT(Kg)[lb]	—
2	B+	GRN	AMBIENT TEMPERATURE	-10°C~50°C[14°F~122°F]
3	A-	RED	INSULATION CLASS	B 130°C[266°F]
4	B-	BLU	TEMPERATURE RISE	MAX.80°C

OSMTEC®
Stepper Motor Specialists



mm

UNITS

1:1

SCALE

DRN

APVD

SIGNATURE

YSX

LJ

DATE

1.13.2026

1.13.2026

STEPPER MOTOR

17HM15-0904S