
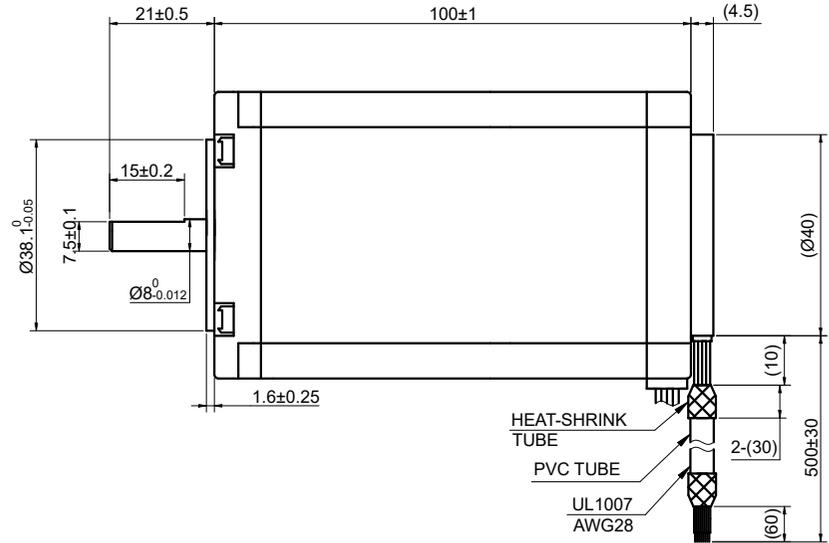


DWG NO. -

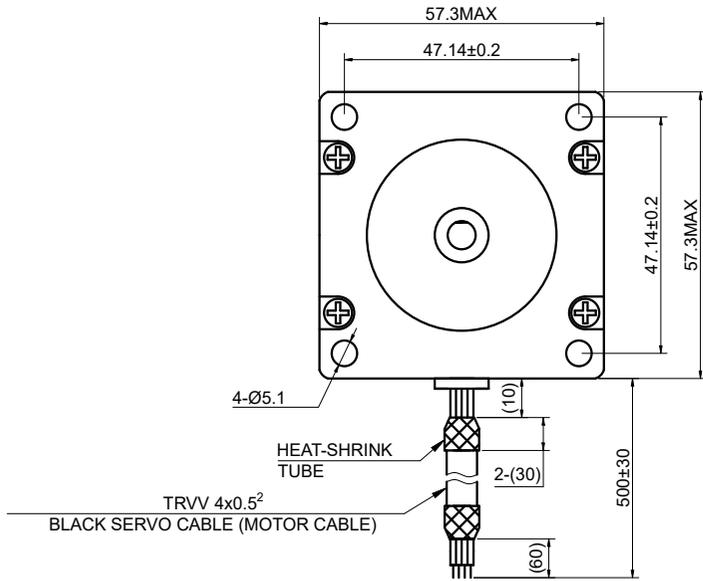

ENCODER CONNECTION:1000PPR(4000CPR)


PIN NO	1	2	3	4	5	6	7	8
LEAD COLOR	BLK	RED	BRN	BLU	ORG	GRN	YEL	WHT
DESCRIPTION	GND	VCC	EA+	EB+	EA-	EB-	EZ+	EZ-

FULL STEP 2 PHASE-Ex.,WHEN FACING MOUNTING END (X)

STEP	A+	B+	A-	B-	↓ CW	↑ CCW	UNIT mm GB/T 1804-M EQV.ISO 2768-1 CLASS M: <=6 ±0.1 >6~30 ±0.2 >30~120 ±0.3 >120~400 ±0.5
1	+	+	-	-			
2	-	+	+	-			
3	-	-	+	+			
4	+	-	-	+			

WINDING			CONNECTION	BIPOLAR
			SPECIFICATION	
			AMPS/PHASE	5.00
			RESISTANCE/PHASE(Ohms)@25°C	0.6±10%
			INDUCTANCE/PHASE(mH)@1KHz	2.30±20%
			HOLDING TORQUE(Nm)[lb-in]	3.00[26.55]
			STEP ANGLE(°)	1.80
			STEP ACCURACY(NON-ACCUM)	±5.00%
PIN NO	BIPOLAR	LEADS	ROTOR INERTIA(g-cm²)	660
1	A+	GRN	WEIGHT(Kg)[lb]	—
2	A-	BLK	AMBIENT TEMPERATURE	-10°C~50°C[14°F~122°F]
3	B+	RED	INSULATION CLASS	B 130°C[266°F]
4	B-	BLU	TEMPERATURE RISE	MAX.80°C

OSMTEC®
Stepper Motor Specialists



mm

UNITS

2:3

SCALE

DRN

APVD

SIGNATURE

ZPJ

YSX

1.16.2026

1.16.2026

DATE

STEPPER MOTOR

23HS40-5004-ME1K